

Fig. 110


Nadelventil, beiderseits Innengewinde, Material: Stahl, 1.4571

A	DN	PN / Bar	C°	L1 / mm	L2 / mm	L3 / mm	F / mm	S1	Material	Art.Nr.
G1/8	4	400	-20°C / +350	50	85	11	50	25	Stahl	10110012
G1/8	4	400	-20°C / +250	45	85	11	50	25	1.4571	10110013
G1/4	5	400	-20°C / +350	55	85	15	50	25	Stahl	10110022
G1/4	5	400	-20°C / +250	55	85	15	50	25	1.4571	10110023
G3/8	6	400		55	85	15	50	25	Stahl	10110032
G3/8	6	400	-20°C / +250	55	85	15	50	25	1.4571	10110033
G1/2	7	400	-20°C / +350	60	85	17	63	30	Stahl	10110042
G1/2	7	400	-20°C / +250	60	85	17	63	30	1.4571	10110043
G3/4	9	200	-20°C / +350	75	105	19	63	35	Stahl	10110062
G3/4	9	200	-20°C / +250	75	105	19	63	35	1.4571	10110063
G1	12	200	-20°C / +350	100	125	21	90	45	Stahl	10110082
G1	12	200	-20°C / +250	100	125	21	90	45	1.4571	10110083
G1 1/4	15	160	-20°C / +100	100	155	22	100	60	Stahl	10110102
G1 1/4	15	160	-20°C / +250	100	155	22	100	60	1.4571	10110103
G1 1/2	22	120	-20°C / +350	130	160	24	100	70	Stahl	10110122
G1 1/2	22	120	-20°C / +250	130	160	24	100	70	1.4571	10110123
G2	22	120	-20°C / +350	130	160	28	100	70	Stahl	10110162
G2	22	120	-20°C / +250	130	160	28	100	70	1.4571	10110163





Fig. 110/MS

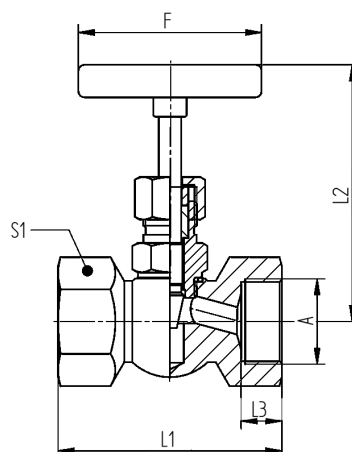


Nadelventil, beiderseits Innengewinde, Material: Messing

A	DN	PN / Bar	C°	L1 / mm	L2 / mm	L3 / mm	F / mm	S1	Material	Art.Nr.
G1/8	4	100	-20°C / +100°C	50	85	10	50	22	Messing	10110011
G1/4	5	100	-20°C / +100°C	50	85	10	50	22	Messing	10110021
G3/8	5	100	-20°C / +100°C	50	85	10	50	22	Messing	10110031
G1/2	6,5	100	-20°C / +100°C	55	90	12	63	25	Messing	10110041
G3/4	8,5	100	-20°C / +100°C	60	110	14	63	32	Messing	10110061
G1	10	100	-20°C / +100°C	75	110	17	63	41	Messing	10110081
G1 1/4	13	100	-20°C / +100°C	100	130	20	90	55	Messing	10110101
G1 1/2	15	100	-20°C / +100°C	100	130	20	90	60	Messing	10110121
G2	15	100	-20°C / +100°C	102	140	21	90	70	Messing	10110161





Fig. 110/L

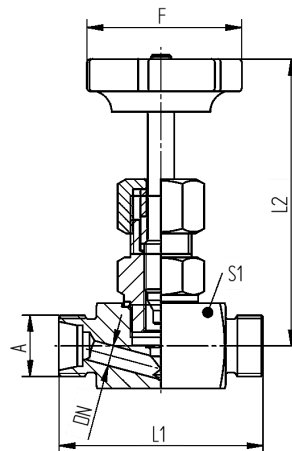

Nadelventil, beiderseits Schneidringanschluss, leichte Reihe, Material: 1.4571

A	DN	PN / Bar	C°	L1 / mm	L2 / mm	F / mm	S1	Material	Art.Nr.
6L	4	315	-20°C / +250°C	60	85	50	25	1.4571	1011006L3
8L	5	315	-20°C / +250°C	60	85	50	25	1.4571	1011008L3
10L	6	315	-20°C / +250°C	60	85	50	25	1.4571	1011010L3
12L	6	315	-20°C / +250°C	60	85	50	25	1.4571	1011012L3

