



Function:	3/2-5/2-Way, monostable design, with reversible seal
Type of operation:	indirect
Actuation:	Spring (mechanical)
Pneum. connections:	G 1/4" (1,3,5) NAMUR hole pattern (2,4)
Operating pressure:	1,5 ... 8 bar
Ingress protection:	IP65
Manual override:	with detent
Duty cycle:	100 %
Temperature range:	-20 ... +50 °C
Housing:	Aluminium anodized
Voltage:	230 V DC
Nominal power:	5 VA
Other:	two silencers inclusive

Technical drawing of the 3000 series actuator, showing front and side views with dimensions and labels.

Front View Dimensions:

- Overall width: 50
- Overall height: 69
- Mounting bracket height: 32
- Actuator body height: 40
- Distance from left face to center of port 4: 20,5
- Distance between centers of ports 4 and 2: 24
- Distance from center of port 2 to right face: 28

Side View Dimensions:

- Overall width: 137,75
- Overall height: 27
- Distance from left face to center of port 5: 22
- Distance between centers of ports 5 and 1: 22
- Distance from center of port 1 to center of port 3*: 22

Labels and Features:

- electr. connector with LED
- PG 9
- G 1/4"
- silencer
- Manual override
- reversible seal
- Port 4 (bottom left)
- Port 2 (bottom right)
- Port 5 (top left)
- Port 1 (top center)
- Port 3* (top right)

Notes:

- * Port 3 is not throttleable

* Port 3 is not throttleable



EMV52323124DC


3/2-5/2-Way-Solenoid-Valve, NAMUR, pneum. connections G 1/4",
with manual override with detent, housing aluminium anodised,
incl. electr. connector with LED, incl. silencers




TECHNICAL DATA

Function:	3/2-5/2-Way, monostable design, with reversible seal
Type of operation:	indirect
Actuation:	Spring (mechanical)
Pneum. connections:	G 1/4" (1,3,5) NAMUR hole pattern (2,4)
Operating pressure:	1,5 ... 8 bar
Ingress protection:	IP65
Manual override:	with detent
Duty cycle:	100 %
Temperature range:	-20 ... +50 °C
Housing:	Aluminium anodized
Voltage:	24 V DC
Nominal power:	3 W
Other:	two silencers inclusive

SYMBOL

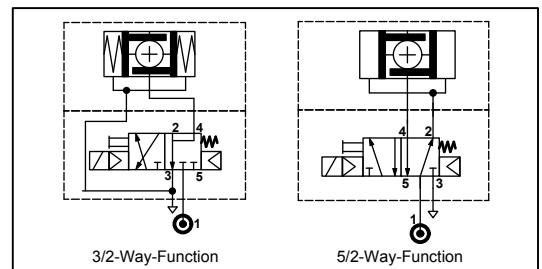

DIMENSION

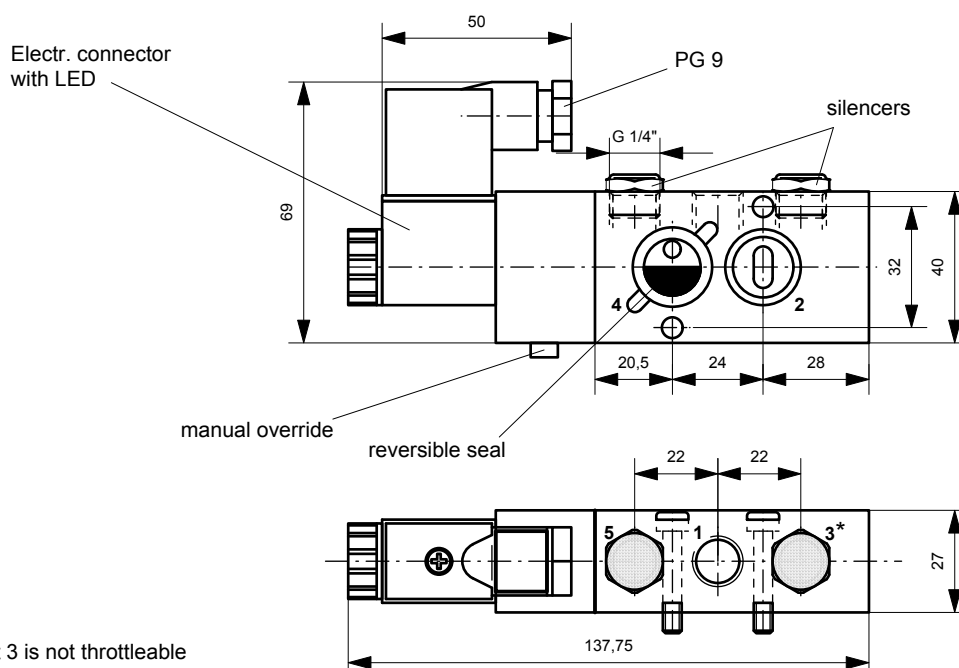

* Port 3 is not throttleable