EMV523231230AC

3/2-5/2-Way-Solenoid-Valve, NAMUR, pneum. connections G 1/4",
with manual override with detent, housing aluminium anodised,
incl. electr. connector with LED, incl. silencers

TECHNICAL DATA

Function:	3/2-5/2-Way, monostable design, with reversible seal
Type of operation:	indirect
Actuation:	Spring (mechanical)
Pneum. connections:	G 1/4" (1,3,5) NAMUR hole pattern (2,4)
Operating pressure:	1,5 ... 8 bar
Ingress protection:	IP65
Manual override:	with detent
Duty cycle:	100 %
Temperature range:	-20 ... +50 °C
Housing:	Aluminium anodized
Voltage:	230 V DC
Nominal power:	5 VA
Other:	two silencers inclusive

SYMBOL

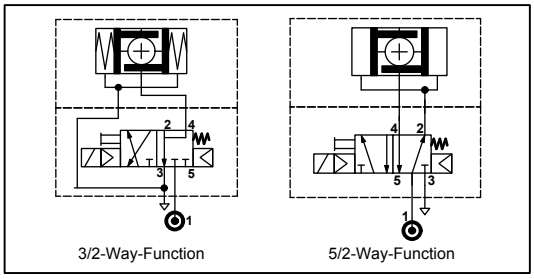

DIMENSION

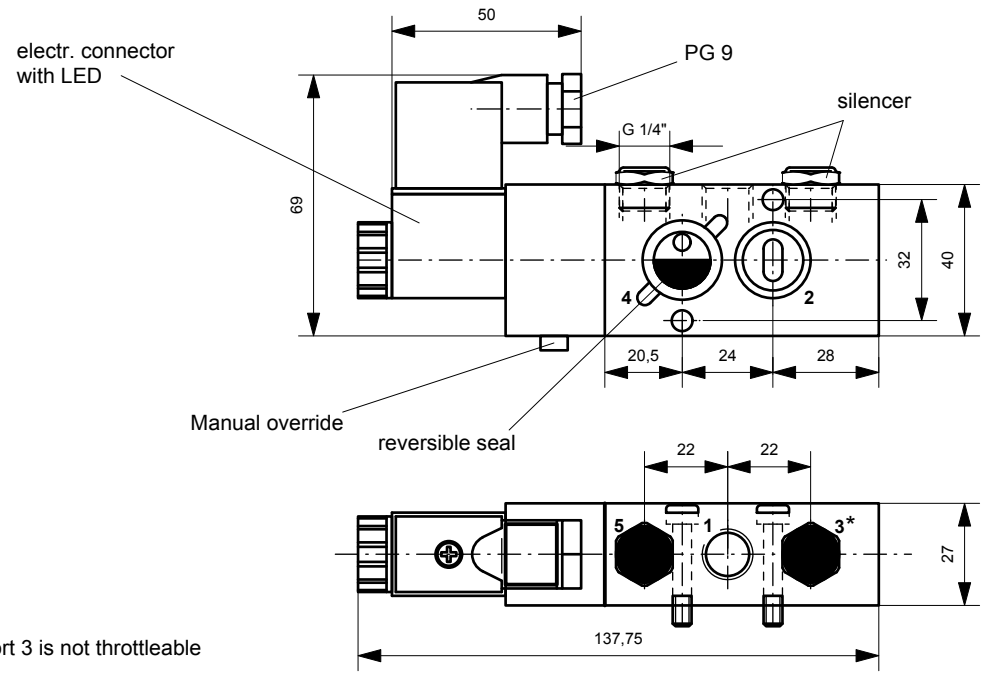

* Port 3 is not throttleable

created: 25.11.11 / SHAM
changed: 18.11.13 / SHAM

Im Katzentach 16-18
D-76275 Ettlingen

Telefon: 07243-59 31-0
Telefax: 07243-59 31-31

e-Mail: info@rotech.de
Internet: www.rotech.de

ROTECH SYSTEMKOMPONENTEN

EMV52323124DC

3/2-5/2-Way-Solenoid-Valve, NAMUR, pneum. connections G 1/4",
with manual override with detent,housing aluminium anodised,
incl. electr. connector with LED, incl. silencers

TECHNICAL DATA

Function:	3/2-5/2-Way, monostable design, with reversible seal
Type of operation:	indirect
Actuation:	Spring (mechanical)
Pneum. connections:	G 1/4" (1,3,5) NAMUR hole pattern (2,4)
Operating pressure:	1,5 ... 8 bar
Ingress protection:	IP65
Manual override:	with detent
Duty cycle:	100 %
Temperature range:	-20 ... +50 °C
Housing:	Aluminium anodized
Voltage:	24 V DC
Nominal power:	3 W
Other:	two silencers inclusive

SYMBOL

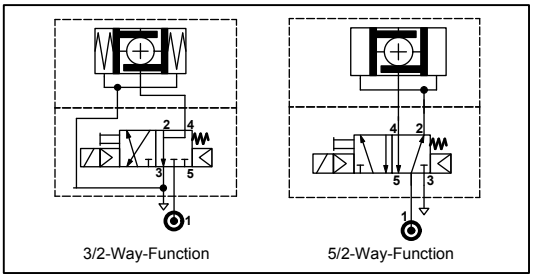

DIMENSION

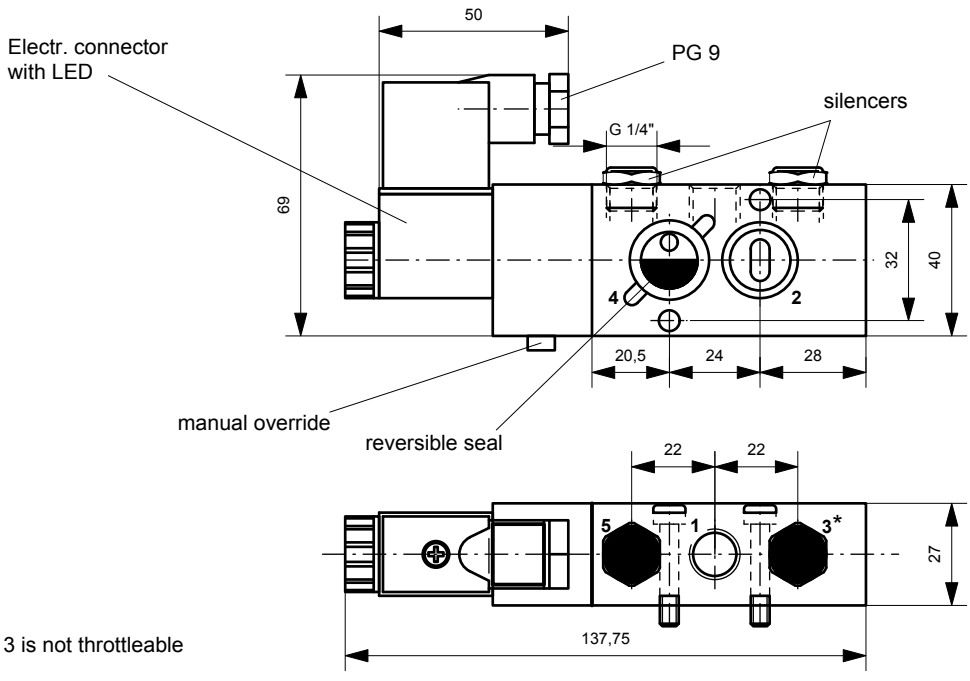

* Port 3 is not throttleable

created: 25.11.11 / SHAM
changed: 18.11.13 / SHAM

Im Katzentach 16-18
D-76275 Ettlingen

Telefon: 07243-59 31-0
Telefax: 07243-59 31-31

e-Mail: info@rotech.de
Internet: www.rotech.de

ROTECH SYSTEMKOMPONENTEN