


Maße / Dimensions
Schieber Serie AT 100 mit Handrad
Knife gate valve series AT 100
with handwheel
DN 100 - DN 300

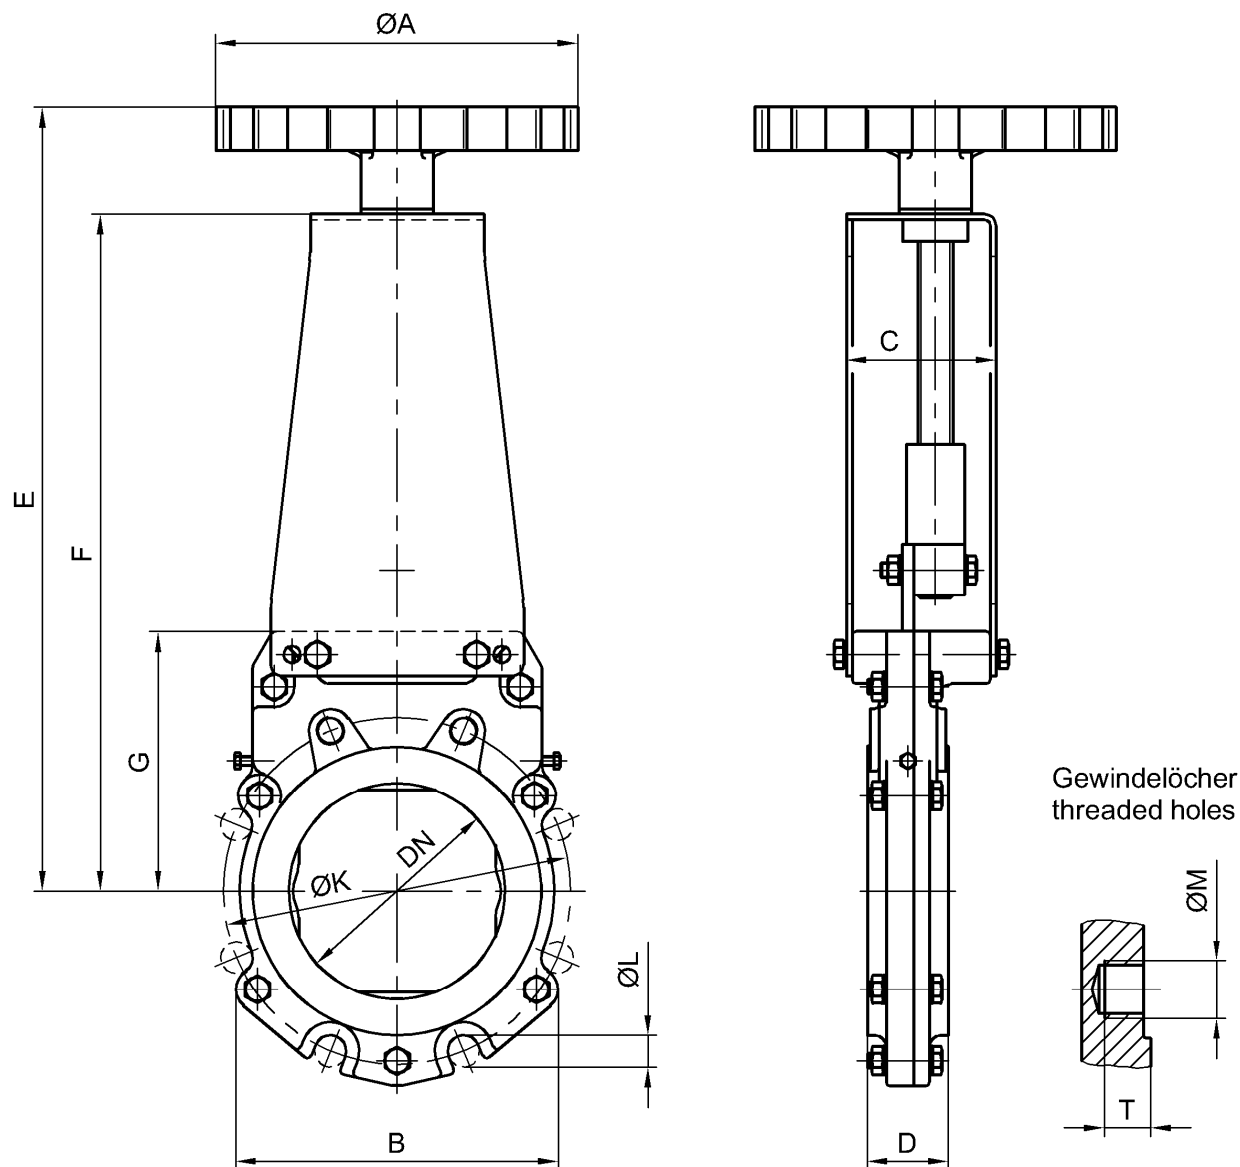


DN	NPS	ØA	B	C	D	E	F	G	ØK	ØL	ØM	T	kg
100	4"	200	164	96	52	404	335	138	180	6xØ18	2xM16	20	10,9
150	6"	250	230	104	56	541	467	179	240	6xØ22	2xM20	21	21,6
200	8"	250	301	104	60	571	497	209	295	6xØ22	2xM20	23	28,6
250	10"	300	328	141	68	734	643	240	350	6xØ22	6xM20	20	54,4
300	12"	400	378	141	78	769	673	270	400	6xØ22	6xM20	23	72,4

Max. Betriebsdruck:
Max. working pressure:

DN	Druck / pressure
100-150	10 bar
200-300	6 bar

Änderungen vorbehalten
subject to changes

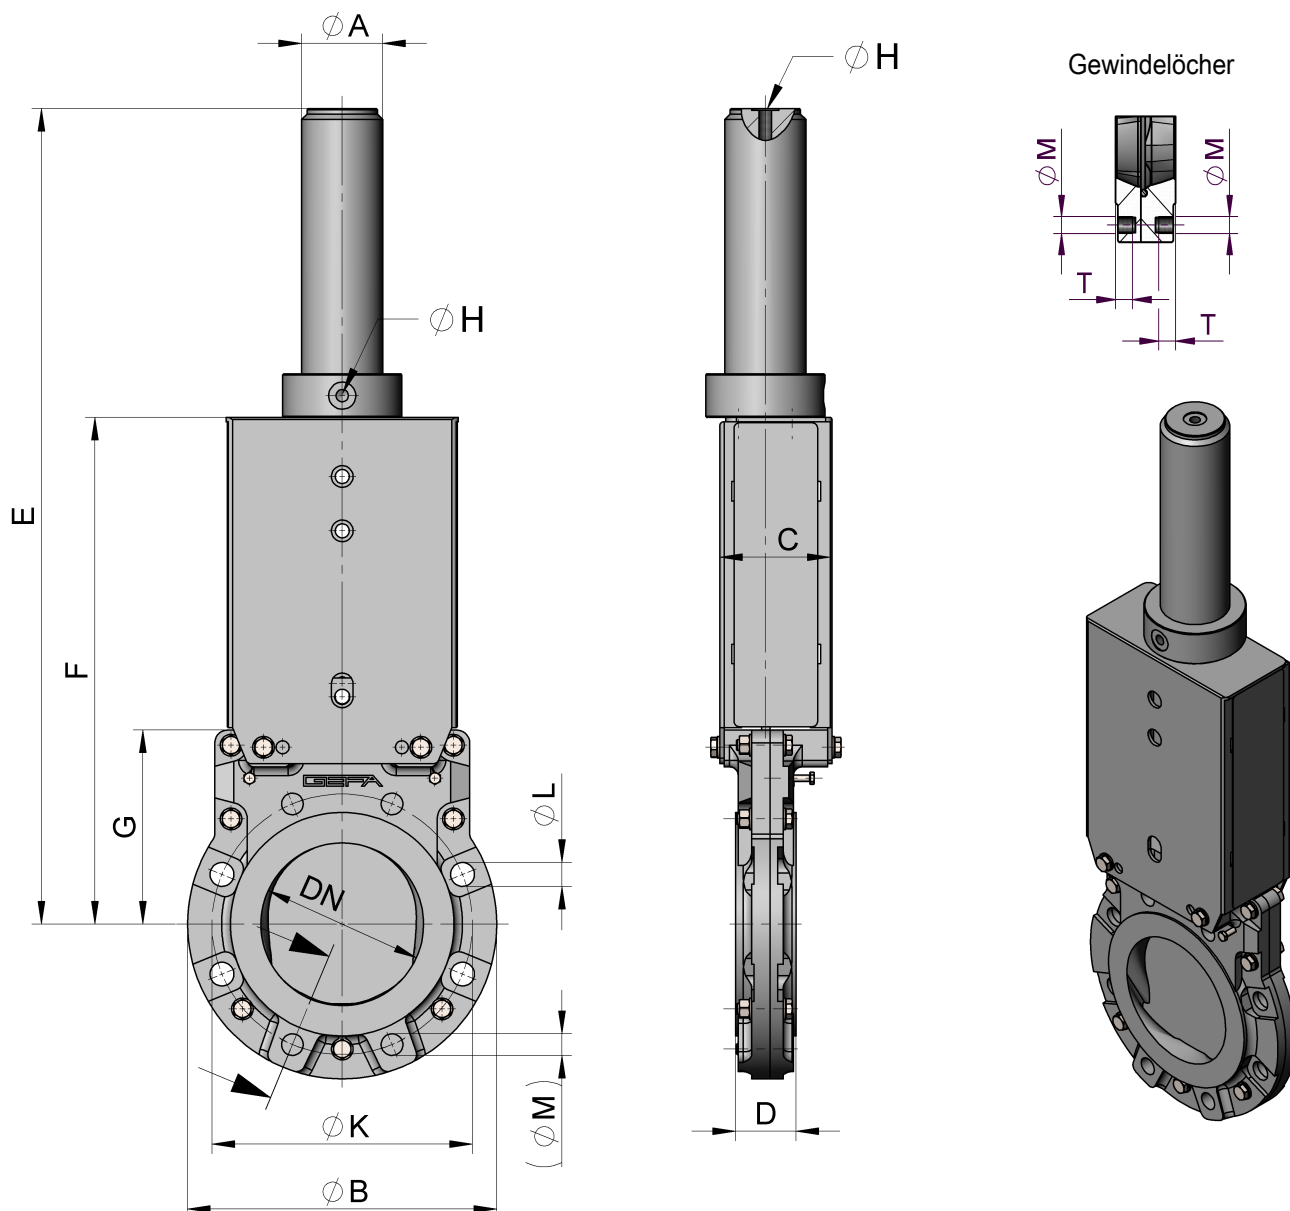
Maßblatt DN50-300 mit Hydraulikzylinder


DN	NPS	Zyl.Ø	ØA	ØB	C	D	E	F	G	ØH	ØK	ØL	ØM	T	kg
50	2"	32	42	165	91	43	415	252	110	G1/4"	125	-	4xM16	15	14
65	2 1/2"	32	42	185	91	46	450	257	115	G1/4"	145	-	4xM16	18	17
80	3"	32	42	200	91	46	501	278	139	G1/4"	160	4xØ18	4xM16	14	19
100	4"	32	42	220	96	52	563	349	152	G1/4"	180	4xØ18	4xM16	16	23
125	5"	32	42	250	96	56	647	357	160	G1/4"	210	4xØ18	4xM16	18	31
150	6"	50	60	285	104	56	750	467	179	G1/4"	240	4xØ22	4xM20	17	42
200	8"	50	60	340	104	60	870	497	209	G1/4"	295	4xØ22	4xM20	18	53
250	10"	63	75	395	141	68	1033	660	257	G1/4"	350	6xØ22	6xM20	21	77
300	12"	63	75	445	141	78	1157	700	297	G1/4"	400	6xØ22	6xM20	22	109

Steuerdruck für Hydraulikzylinder : 120 bar

Maximal zulässiger Druck : 10 bar

Änderungen vorbehalten